# PerfectView Direct Vent Gas Fireplaces



The perfectly brilliant PerfectView series.

# PerfectView Series

Nothing makes a home feel more like home than the ambiance of a fireplace. And nothing comes close to the PerfectView Series from Majestic®. Taller, wider glass sizes create huge viewing areas without an equally large footprint. Plus different model sizes and various heat outputs accommodate many different room sizes, ensuring comfort even in the largest rooms. With our authentic log and burn, the flames are even more realistic than ever. Replaceable louvers in multiple colors and a true zero clearance means you have flexibility to match any décor. Efficient. Easy to install. And beauty that lasts. Simply perfect.













BrickWorks Sandstone Refractory Marquette Face Kit is available in Arched or Square styles in three finishes: Modern Pewter, Rustic

Bronze or Ebony Black

in Modern Pewter finish with



36LDV shown with Georgian Cast Iron Surround & Bay Front in Ebony Black finish with BrickWorks Sandstone Refractory

## **Optional Trim Kits:**

Romanesque Face Kit available in Arched or Square styles in three finishes: Modern Pewter, Rustic Bronze and Ebony Black

36LDV shown with Romanesque Face Kit in

arched profile in Rustic Bronze finish

with BrickWorks Colonial Red Refractory

 Georgian Cast Surround and Bay Front available in Classic Black or high luster Ebony Black Porcelain Enamel

# BrickWORKS



Styled to look authentic, with a patina that gives every fireplace just the right flair and look. Any of the four gorgeous BrickWorks colors are available on the 36LDV only.

#### Features & Benefits

- Authentic looking brick & mortar design 4 choice colors:
- Colonial Red Brick with light gray tone mortar – A traditional look and texture of reclaimed & weathered brick
- Sandstone Brick with light gray tone mortar – A traditional color and texture for fireplace brick
- Classic Black with black mortar
   A monotone brick that is subtle, but stylishly enhances a gas fireplace interior
- Silver-Gray with dark gray tone mortar – A contemporary color for fireplace brick
- Dramatically enhances the look of your fireplace
- Allows you to customize your 36LDV direct vent gas fireplace
- Dramatic backdrop to our glowing logs & dramatic, golden flames

**EFFICIENCIES** 

Easy to install

## PerfectView Trim Options


TRIM KIT OPTIONS	33LDV	36LDV	39LDV	43LDV
Primary Starter Louver Accent Trim - Polished Brass		√	√	√
Primary Starter Louver Accent Trim - Pewter	√	√	√	√
Primary Starter Louver Accent Trim - Rustic Bronze	√	√		
Additional Louver Kits				
Additional Louver Accent Trim - Polished Brass		√	√	
Additional Louver Accent Trim - Pewter	√	√	√	√
Additional Louver Accent Trim - Rustic Bronze	√	√		
Filigree Louver Kits				
Filigree Louver Replacement - Top/Btm - Black	√	√		
Filigree Louver Replacement - Top/Btm - Pewter		√		
Filigree Louver Replacement - Top/Btm - Rustic Bronze		√		


TRIM KIT OPTIONS	33LDV	36LDV	39LDV	43LDV
Adjustable 1 3/8" Reg Perimeter Trim Kit - Pewter	√	√	√	
Adjustable 1 3/8" Reg Perimeter Trim Kit - Rustic Bronze	√	√	√	
Adjustable 2 3/8" Med Perimeter Trim Kit - Black	√	√	√	
Adjustable 2 3/8" Med Perimeter Trim Kit - Polished Brass		√	√	
Adjustable 2 3/8" Med Perimeter Trim Kit - Pewter	√	√	√	√
Arch Screen Doors				
Door Face Kit - Black	√	√	√	
Door Face Kit - Rustic Bronze		√	√	
Door Face Kit - Pewter	√	√		

				EFFICIENCIES		E3
Model	Fuel	Max Input	Min Input	EnerGuide Rating	Steady State rating	AFUE By D.O.E. Rating
33LDVRRN	Natural Gas	16,000 BTU	11,200 BTU	62.6 %	82 %	59 %
33LDVRRP	Propane	16,000 BTU	12,000 BTU	62.6 %	83 %	59 %
33LDVREN	Natural Gas	16,000 BTU	11,200 BTU	72.7 %	82 %	59 %
33LDVREP	Propane	16,000 BTU	12,000 BTU	72.7 %	83 %	59 %
36LDVRRN	Natural Gas	19,500 BTU	13,650 BTU	57.5 %	82 %	58 %
36LDVRRP	Propane	19,500 BTU	14,625 BTU	57.5 %	83 %	58 %
36LDVREN	Natural Gas	19,500 BTU	13,650 BTU	63.6 %	82 %	58 %
36LDVREP	Propane	19,500 BTU	14,625 BTU	63.6 %	83 %	58 %
39LDVRRN	Natural Gas	23,000 BTU	16,100 BTU	50.2 %	79 %	63 %
39LDVRRP	Propane	22,500 BTU	16,875 BTU	50.2 %	80 %	63 %
39LDVREN	Natural Gas	23,000 BTU	16,100 BTU	54.2 %	79 %	63 %
39LDVREP	Propane	22,500 BTU	16,875 BTU	54.2 %	80 %	63 %
43LDVRRN	Natural Gas	26,000 BTU	18,200 BTU	54.3 %	78 %	63 %
43LDVRRP	Propane	24,000 BTU	18,000 BTU	54.3 %	79 %	63 %
43LDVREN	Natural Gas	26,000 BTU	18,200 BTU	58.3 %	78 %	63 %
43LDVREP	Propane	24,000 BTU	18,000 BTU	58.3 %	79 %	63 %
33LDVTRN	Natural Gas	16,000 BTU	11,200 BTU	56 %	78 %	58 %
33LDVTRP	Propane	16,000 BTU	12,000 BTU	56 %	79 %	58 %
33LDVTEN	Natural Gas	16,000 BTU	11,200 BTU	63.3 %	78 %	58 %
33LDVTEP	Propane	16,000 BTU	12,000 BTU	63.3 %	79 %	58 %
36LDVTRN	Natural Gas	19,500 BTU	13,650 BTU	55 %	79 %	58 %
36LDVTRP	Propane	19,500 BTU	14,625 BTU	55 %	80 %	58 %
36LDVTEN	Natural Gas	19,500 BTU	13,650 BTU	60.6 %	79 %	58 %
36LDVTEP	Propane	19,500 BTU	14,625 BTU	60.6 %	80 %	58 %
39LDVTRN	Natural Gas	23,000 BTU	16,100 BTU	51.4 %	77 %	63 %
39LDVTRP	Propane	22,500 BTU	16,875 BTU	51.4 %	78 %	63 %
39LDVTEN	Natural Gas	23,000 BTU	16,100 BTU	55.4 %	77 %	63 %
39LDVTEP	Propane	22,500 BTU	16,875 BTU	55.4 %	78 %	63 %
43LDVTRN	Natural Gas	26,000 BTU	18,200 BTU	55.7 %	77 %	63 %
43LDVTRP	Propane	24,000 BTU	18,000 BTU	55.7 %	78 %	63 %
43LDVTEN	Natural Gas	26,000 BTU	18,200 BTU	59.8 %	77 %	63 %
43LDVTEP	Propane	24,000 BTU	18,000 BTU	59.8 %	78 %	63 %

# PerfectView Direct Vent Gas Fireplaces Models • 33LDV • 36LDV • 39LDV • 43LDV



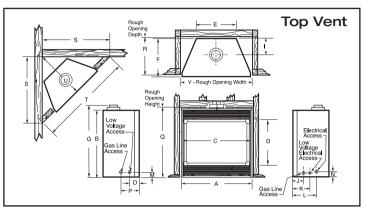

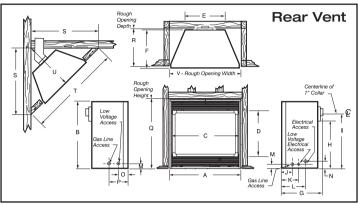

Ref.	33LDVT	36LDVT 39LDVT		43LDVT			
Α	33" (838 mm)	36" (914 mm)	39" (991 mm)	43" (1092 mm)			
В	28 7/8" (733 mm)	34 1/4" (870 mm)	34 1/4" (870 mm)	37" (940 mm)			
С	31 1/4" (794 mm)	34 1/4" (870 mm)	37 1/4"(946 mm)	41 1/4" (1048 mm)			
D	18 3/8" (466 mm)	23" (584 mm)	23" (584 mm)	25 3/4"(654 mm)			
Е	22 3/4" (578 mm)	24" (610 mm)	27" (686 mm)	31" (788 mm)			
F	14" (356 mm)	16" (406 mm)	16" (406 mm)	16" (406 mm)			
G	31 3/4" (806 mm)	37" (939 mm)	37" (939 mm)	39 3/4" (1010 mm)			
Н							
- 1	6" (152 mm)	6 3/4" (170 mm)	6 3/4" (170 mm)	6 3/4" (170 mm)			
J	4 5/8" (118 mm)	5 5/8" (143 mm)	5 5/8" (143 mm)	5 5/8" (143 mm)			
K	6 3/8" (162 mm)	8" (203 mm)	8" (202 mm)	8" (203 mm)			
L	8 7/8" (225 mm)	11 7/8" (302 mm)	11 7/8" (302 mm)	11 7/8" (302 mm)			
M	2" (51 mm)	2" (51 mm)	2" (51 mm)	2" (51 mm)			
N	3 3/8" (86 mm)	3 1/4" (83 mm)	3 1/4" (83 mm)	3 1/4" (83 mm)			
0	4 5/8" (118 mm)	6 3/4" (172 mm)	6 3/4" (172 mm)	6 3/4" (172 mm)			
Р	6 3/8" (162 mm)	9 1/4" (235 mm)	9 1/4" (235 mm)	9 1/4" (235 mm)			
	Framing Dimensions						
Q	29 5/8" (752 mm)	35" (889 mm)	35" (889 mm)	37 3/4" (959 mm)			
R	14 1/2" (368 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)			
S	35 3/4" (908 mm)	39 3/4" (1010 mm)	43 1/8" (1095 mm)	44 1/8" (1121 mm)			
Т	50 1/2" (1238 mm)	55 1/4" (1403 mm)	60 7/8" (1546 mm)	62 3/8" (1584 mm)			
U	25 1/4" (641 mm)	28 1/8" (714 mm)	30 7/8" (784 mm)	31 1/4" (794 mm)			
V	33 1/2" (851 mm)	36 1/2" (927 mm)	39 1/2" (1003 mm)	43 1/2" (1105 mm)			

Ref.	33LDVR	36LDVR	39LDVR	43LDVR			
А	33" (838 mm)	36" (914 mm)	39" (991 mm)	43" (1092 mm)			
В	28 7/8" (733 mm)	34 1/4" (870 mm)	34 1/4" (870 mm)	37" (940 mm)			
С	31 1/4" (794 mm)	34 1/4" (870 mm)	37 1/4" (946 mm)	41 1/4" (1048 mm)			
D	18 3/8" (466 mm)	23" (584 mm)	23" (584 mm)	25 3/4" (654 mm)			
E	24 7/8" (632 mm)	24" (610 mm)	27" (686 mm)	31" (788 mm)			
F	11 1/2" (292 mm)	16" (406 mm)	16" (406 mm)	16" (406 mm)			
G	14 1/4" (362 mm)	18 3/4" (476 mm)	18 3/4" (476 mm)	18 3/4" (476 mm)			
Н	19 3/4" (501 mm)	24 1/4" (616 mm)	24 1/4" (616 mm)	27" (686 mm)			
I	23 1/4" (590 mm)	27 3/4" (705 mm)	27 3/4" (705 mm)	30 1/2"(775 mm)			
J	4 3/4" (121 mm)	5 5/8" (143 mm)	5 5/8" (143 mm)	5 5/8" (143 mm)			
K	6 5/16" (160 mm)	8" (203 mm)	8" (203 mm)	8" (203 mm)			
L	8 7/8" (225 mm)	11 7/8" (302 mm)	11 7/8" (302 mm)	11 7/8" (302 mm)			
M	2" (51 mm)	2" (51 mm)	2" (51 mm)	2" (51 mm)			
N	3 3/8" (86 mm)	3 1/4" (83 mm)	3 1/4" (83 mm)	3 1/4" (83 mm)			
0	4 3/4" (121 mm)	6 3/4" (172 mm)	6 3/4" (172 mm)	6 3/4" (172 mm)			
Р	6 5/16" (160 mm)	9 1/4" (235 mm)	9 1/4" (235 mm)	9 1/4" (235 mm)			
	Framing Dimensions						
Q	29 5/8" (752 mm)	35" (889 mm)	35" (889 mm)	37 3/4" (959 mm)			
R	12" (305 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)	16 1/2" (419 mm)			
S	36" (914 mm)	41 5/8" (1057 mm)	44" (1118 mm)	44 1/8" (1121 mm)			
Т	51" (1295 mm)	58 7/8" (1495 mm)	62 1/4" (1581 mm)	62 3/8" (1584 mm)			
U	25 1/2" (648 mm)	29 7/8" (748 mm)	31 1/8" (790 mm)	31 1/4" (794 mm)			
V	33 1/2" (851 mm)	36 1/2" (927 mm)	39 1/2" (1003 mm)	43 1/2" (1105 mm)			


#### **Features and Benefits**

- Realistic and authentic looking Log Design
- · Dedicated Top or Rear Direct Vent
- · Tempered Glass Front
- Insta-Flame Ceramic Radiant Burner
- Fuel: Natural Gas & Propane (Conversion kits Available)
- True Zero Clearance Fireplace (to combustibles)
- Slim firebox depth takes up less floor space
- · Top and Bottom Louvers
- Models available with Millivolt Valve or Electronic Ignition
- · Glowing Ember Bed and Lava Rock

### **Optional Accessories:**

- Rear/Top Vent Ceramic Refractory available in sizes 33"/39"/43"
- BrickWorks Refractory available in 4 Colors for 36LDV (Colonial Red, Sandstone, Classic Black and Silver-Gray)
- Fan Kit FK12 or FK24 with Automatic Thermostatic Control and Rheostat
- Thermostat
- Remote Controls RC1, RC2
- Electrical Box and Wall Switch

### Georgian Cast Surround and Bay Specifications for 36LDV









Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-02



ph: 1.800.525.1898

www.vermontcastings.com www.majesticproducts.com YOUR DEALER

© 2008 CFM Corporation - All rights reserved. Majestic® Fireplaces is a registered trademark of CFM Corporation. In the interest of constant product improvements, we reserve the right to change specifications without notice. Before installations, please read Installation Instructions and check all local Building Codes and Gas Regulations. Please see your Dealer or visit www.majesticproducts.com for complete warranty information.